
## Instructions for all WHBB units both 10" & 20", single and double systems

- 1: Connect incoming water line to inlet and outlet of filter system as labeled. Single units connect directly to the head of unit. Double systems connect to sharkbite inlet/outlet using 3/4" copper or cpvc piping. Use flexible connection lines when possible to aid in the changing of cartridges.
- 2: It is recommended to install a bypass line to prevent water service interruption during maintenance and changing of the filter cartridges.
- 3: Once installation is completed and water is turned on push and hold down pressure release valve(s) on filter caps until water fills up the unit and all air is purged.
- 4: As with all carbon filtration systems the unit needs an initial rinse to remove carbon dust. Turn on water at nearest faucet and let run until water is clear.



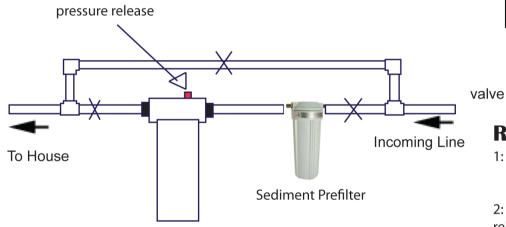

**Fittings:** 

3/4" inlet/outlet

**Water Flow:** 

20" units up to 10 gpm 10" units up to 5 gpm

Capacity:

20" units 80,000+ gallons 10" units 50,000+ gallons

**Warranty:** 

Tanks carry 10-year pro-rated

**Temperature Rating:** 

35F-125F

**Pressure Rating:** 

max 100psi

**Limited Warranty** 

This CuZn filter is designed for use on potable systems only. Its effectiveness may be reduced in areas where municipally treated water has chemicals such as polyphosphates to alleviate water problems caused by high iron content. Do not use this filter in water supplies that may reach pressures over the recommended use state on the instructions. The manufacturer warrants this product to be free from defects in materials and workmanship when installed, operated, and maintained in the manner instructed, for a period of one year from date of purchase. The warranty is limited to the repair or replacement of any filter that fails to perform due to faulty materials or workmanship during the warranty period. To qualify for this warranty, the filter must be maintained and replaced as stated in the instructions. Save your receipt. CuZn is not responsible for any damages occurring during the misuse of this product.

## **Refill Instructions**

- 1: Shut off water supply! (open by-pass)
- 2: Push down and hold pressure release before unscrewing the sump.
- 3: Remove the sump(s). Pull out used cartridge and replace with the new one. Make sure gasket is in the same position pointed toward the head.
- 4: Screw sump(s) back on to the head. Guides in the head will assure cartridge is seated properly. Cartridge wrenches are available from your distributor if cartridge replacement is difficult.

