

# ReDOXPRO3 Cube

## Chemical Free Cooling Tower Solution





### ReDOXPRO3 Features & Benefits:

- No Plumbing necessary
- Install in any process liquid sump.
- Maintenance Free
- Simple Yearly replacement.
- pH balancing
- Removes Scale, reducing cooling costs ' by 40% for every .1 inch scale removed
- Increases cycles of concentration up to 3 times
- Eliminates costly chemical additives
- Controls bacteria, algae & mold, including legionella


Multiple ReDOXPRO3 Cubes units can be utilized for applications with high flow rates. A single RedOXPRO3 Cube Unit holds 1 cubic foot of our patented reticulated KDF media, The ReDOXPRO3 Cube weighs approx 22 LBS and is capable of treating a cooling tower with a service flow rate of 450gpm for approximately 1 year. Divide your service flow rate by 450gpm to calculate how many ReDOXPRO3 Cube units are required for your application.

**ReDOXPRO3 vs. Standard Chemical Use \***  
 Statistics shown in this chart are from a ReDOXPRO3 installation at Mere Cruiser's plant in Oklahoma

#### SCALE, FOULING & CORROSION

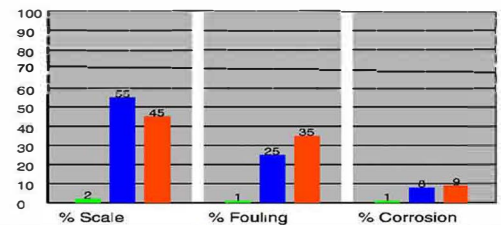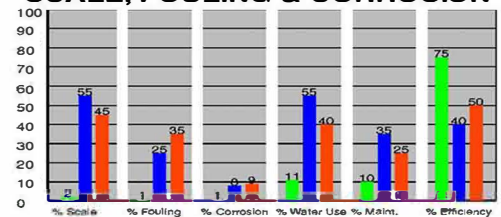

#### WATER USE

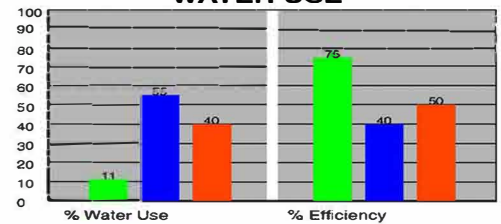

#### MAINTENANCE & WATER USE

