




GoGreen Commerical Water Purifier



- Controls Scale Formation
- Prohibits Corrosion
- Bacteriostatic - Prohibits Growth of Bacteria, Algae, & Mold
- No Salt
- Reduces Water Usage
- Eliminates Chloramine, Chlorine and Other Harmful Chemicals (THM & DPB) and Metals
- Reduces Energy Usage
- Restores Water Flow
- Reduces Wear and Tear on Appliances and Plumbing Fixtures
- No Maintenance
- Chemical Free
- Energy Efficient
- Saves Time and Money

Specifications

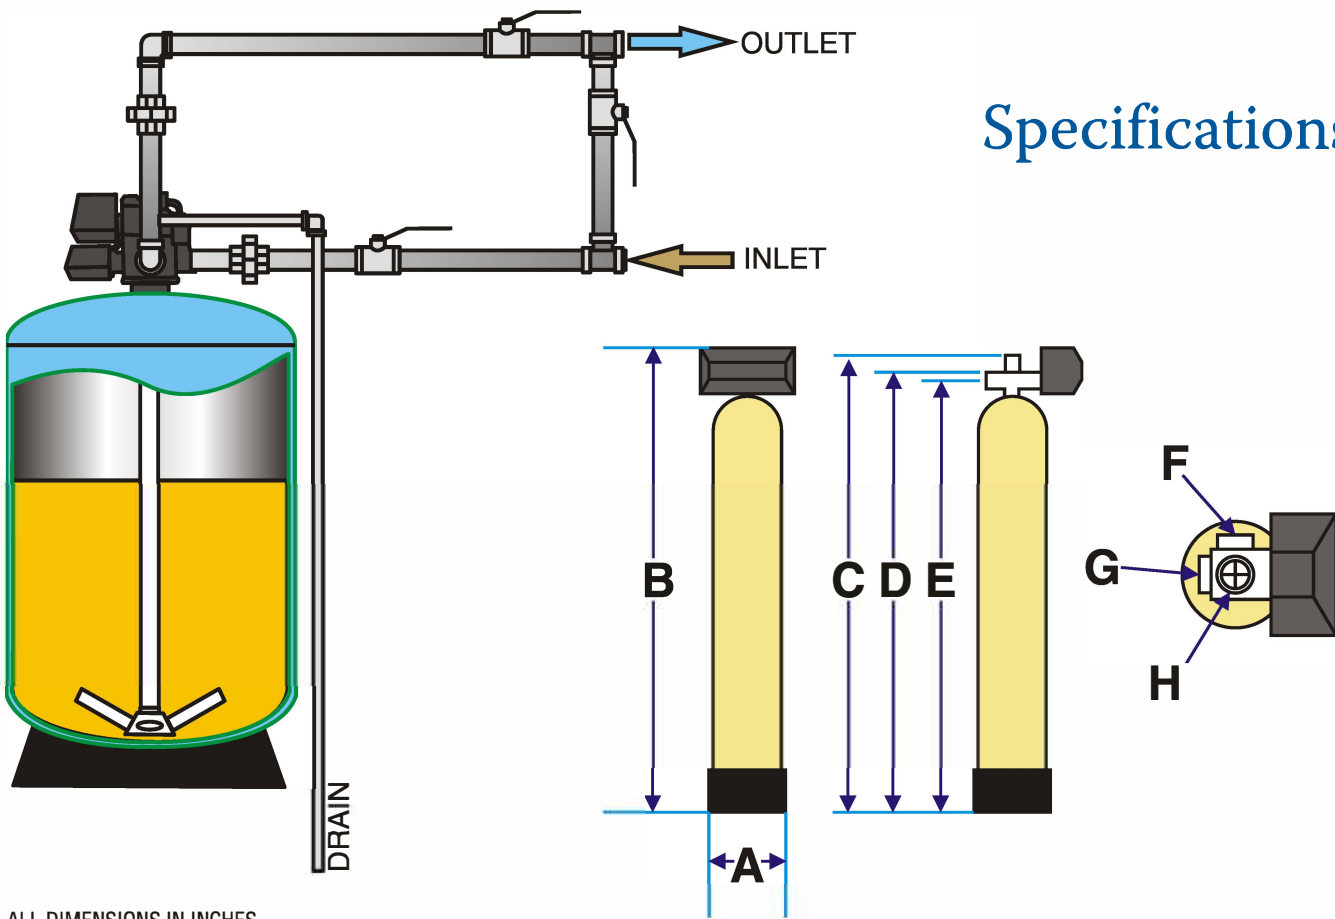

ALL DIMENSIONS IN INCHES

Model No.	A	B	C	D	E	F	G	H	GPM	Inlet/Outlet	System Distribution	Media Lbs. of
WC-1035	12	59	55-3/4	54-1/4	53-9/16	Drain	Inlet	3/4	35	1	1	171
WC-1560	14	71-1/2	69	67-3/4	66-3/4	Out	Inlet	1	60	1-1/2	1-1/2	285
WC-2090	16	75	72	69-1/2	69	Out	Inlet	2	90	2	2	456
WC-50115	21	72	69	66-1/2	66	Out	Inlet	2	115	2	2	850
WC-90200	24	87	87	77-1/4	77-1/4	Out	Inlet	3	200	3	3	1150

At continuous flow rates all units can drop up to 15 psi.


At peak flow rates all units can drop up to 25 psi.



GoGreen® commercial water filter systems provide you with the ultimate in flexible system design using the best components available. Depending upon your requirements, the system can be configured with one, two or more filtering units –whatever you need.

We use Fleck backwashing heads because they are the best. The filter tank housing, available in either beige or blue, is inside-coated with industrial epoxy resin for years of dependable, trouble-free service.

Talk to our knowledgeable representatives for everything you need to know. They can analyze your filter needs and recommend a GoGreen system for your application.



- ✓ Control Scale
- ✓ Restore Water Flow
- ✓ Prevent Corrosion
- ✓ Protect Equipment
- ✓ Save Time
- ✓ Save Money